

**Specifications**

Sampling Method	Extractive	
Alarm Method	Gas Alarm	Beeping with flashing red light and AL icon on the LCD
	Device Error	Beeping with flashing yellow light and error message on the LCD
Power Source	•Non-rechargeable alkaline AA battery x4: Toshiba LR6, Panasonic LR6X, Duracell MN1500, Energizer E91 or Varta 4106 •Rechargeable nickel metal hydride AA battery x4: New Cosmos HR-3UTG	
Operating Temperature/Humidity	-20 to +50°C 95%RH. No condensation	
Compliance*1	ATEX: Ⓜ II 1G Ex ia da IIC T4 Ga*1 IECEx: Ex ia da IIC T4 Ga*1 CE (ATEX, EMC, RoHS, RE and LVD directives)	
Ingress Protection	IP67	
Main Features	Self-diagnosis (sensor error), Zero adjustment, Battery level indication, Flashlight, Peak-hold, LCD backlight, Audio alarm muting during gas alarm, Time indication, Alarm test, Alarm volume change, Audio muting	
Dimensions	W91xH164xD44 mm	
Mass	Approx. 460 g (including batteries)	
Accessories	Gas sampling tube (1m), Shoulder strap, Drain filter, Filter element, Alkaline AA batteries (or Rechargeable nickel metal hydride AA batteries) x 4, Screen protector film x 3	

**Multi Gas Detector**

Model	XP-3368II-W		XP-3368II		XP-3318II	
	Target Gas	Oxygen	Target Gas	Oxygen	Target Gas	Oxygen
Target Gas	Combustible gas /solvent gas	Oxygen	Combustible gas /solvent gas	Oxygen	Combustible gas /solvent gas	Oxygen
Detection Principle	Catalytic	Galvanic cell	Catalytic	Galvanic cell	Catalytic	Galvanic cell
Measuring Range (Reference Indication)	0.0-100.0%LEL (100.1-110.0%LEL) Enable to display in ppm.	0-25vol% (25.1-50.0vol%)	0-5000ppm or 0-10000ppm (5001-5500ppm or 10001-11000ppm)	0-25vol% (25.1-50.0vol%)	0-100%LEL (100.1-110.0%LEL)	0-25vol% (25.1-50.0vol%)
Accuracy*2	≤ 1000ppm : ±100ppm 1001ppm < n ≤ 10000ppm : ±500ppm Other than above : ±5%F.S.	±0.3vol%	≤10%F.S. : ±1%F.S. >10%F.S. : ±5%F.S.	±0.3vol%	±5%F.S.	±0.3vol%
Resolution	0.1%LEL or 1ppm	0.1vol%	1ppm	0.1vol%	0.1%LEL	0.1vol%
Alarm Set Value	20%LEL	18vol%	250ppm or 500ppm	18vol%	20%LEL	18vol%
Response Time	T90 : 30 seconds	—	T90 : 30 seconds	—	T90 : 30 seconds	—
Continuous Operation Time*3	Approx. 15 hours					

**Combustible Gas Detector**

Model	XP-3360II-W	XP-3360II	XP-3310II
Target Gas	Combustible gas/solvent vapor		
Detection Principle	Catalytic		
Measuring Range (Reference Indication)	0.0-100.0%LEL (100.1-110.0%LEL) Enable to display in ppm.	0-5000ppm or 0-10000ppm (5001-5500ppm or 10001-11000ppm)	0-100%LEL (100.1-110.0%LEL)
Accuracy*2	≤ 1000ppm : ±100ppm 1001ppm < n ≤ 10000ppm : ±500ppm Other than above : ±5%F.S.	≤10%F.S. : ±1%F.S. >10%F.S. : ±5%F.S.	±5%F.S.
Resolution	0.1%LEL or 1ppm	1ppm	0.1%LEL
Alarm Set Value	20%LEL	250ppm or 500ppm	20%LEL
Response Time	T90: 30 seconds		
Continuous Operation Time*3	Approx. 15 hours		

**Oxygen Detector**

Model	XP-3380II
Target Gas	Oxygen
Detection Principle	Galvanic cell
Measuring Range (Reference Indication)	0-25vol% (25.1-50.0vol%)
Accuracy*2	±0.3%F.S.
Resolution	0.1vol%
Alarm Set Value	18vol%
Response Time	—
Continuous Operation Time*3	Approx. 100 hours

\*1. Other than XP-3380II model, when using alkaline AA batteries. Please contact us for full information.

\*2. Under an identical measurement condition.

\*3. At 25°C, with no alarm and backlight off. The time varies according to the circumstances, condition of use, storage period, battery manufacturer, etc.

**NEW COSMOS ELECTRIC CO., LTD.**

NEW COSMOS ELECTRIC CO., LTD. [Overseas Business Division]  
 2-6-2 Hamamatsu-cho, Minato-ku, Tokyo 105-0013 JAPAN  
 TEL. +81-3-5403 2715 Email. e-info@new-cosmos.co.jp  
 URL. <https://www.newcosmos-global.com>

NEW COSMOS ELECTRIC (SHANGHAI) CO., LTD.  
 4th Plant No.385, Dongxing Road, Songjiang Industrial Zone, Shanghai, China 201613  
 TEL. +86-21-6774 3138 Email. info@new-cosmos.com.cn  
 URL. <http://new-cosmos.com.cn>

NEW COSMOS ELECTRIC KOREA CO., LTD.  
 805-806, 10, Seongnam-daero 43beon-gil, Bundang-gu, Seongnam-si, Gyeonggi-do, Republic of Korea  
 TEL. +82-31-703-3102 Email. info@new-cosmos.co.kr  
 URL. <http://www.new-cosmos.co.kr>

New Cosmos USA, Inc.  
 650 Warrenville Road, Suite 101, Lisle, IL 60532, USA  
 TEL. +1-847-749 3064  
 URL. [www.denovadetect.com](http://www.denovadetect.com)

NEW COSMOS-BIE B.V.  
 Maxwellstraat 7, NL-1704 SG, Heerhugowaard, The Netherlands  
 TEL. +31-72-576 5630 Email. sales@newcosmos-europe.com  
 URL. <http://www.newcosmos-europe.com>


NEW COSMOS ELECTRIC CO., LTD. [Taiwan Office]  
 8F, No.419, Sec.2, Gongdao 5th Road, Hsinchu city, Taiwan 30070  
 TEL. +886-3-574 4593 Email. cosmost1@ms75.hinet.net

NEW COSMOS ELECTRIC CO., LTD. [Thailand Office]  
 4345 Bhiraj Tower at BITEC, 23rd Floor, Unit. 23090, Sukhumvit Rd., South Bangna, Bangna, Bangkok 10260 Thailand  
 TEL. +66-95-558-5067

PORTABLE GAS DETECTOR  
**XP-3000II SERIES**

**One Unit Can Measure Multiple Gases**

For Combustible Gas and Oxygen Measurement

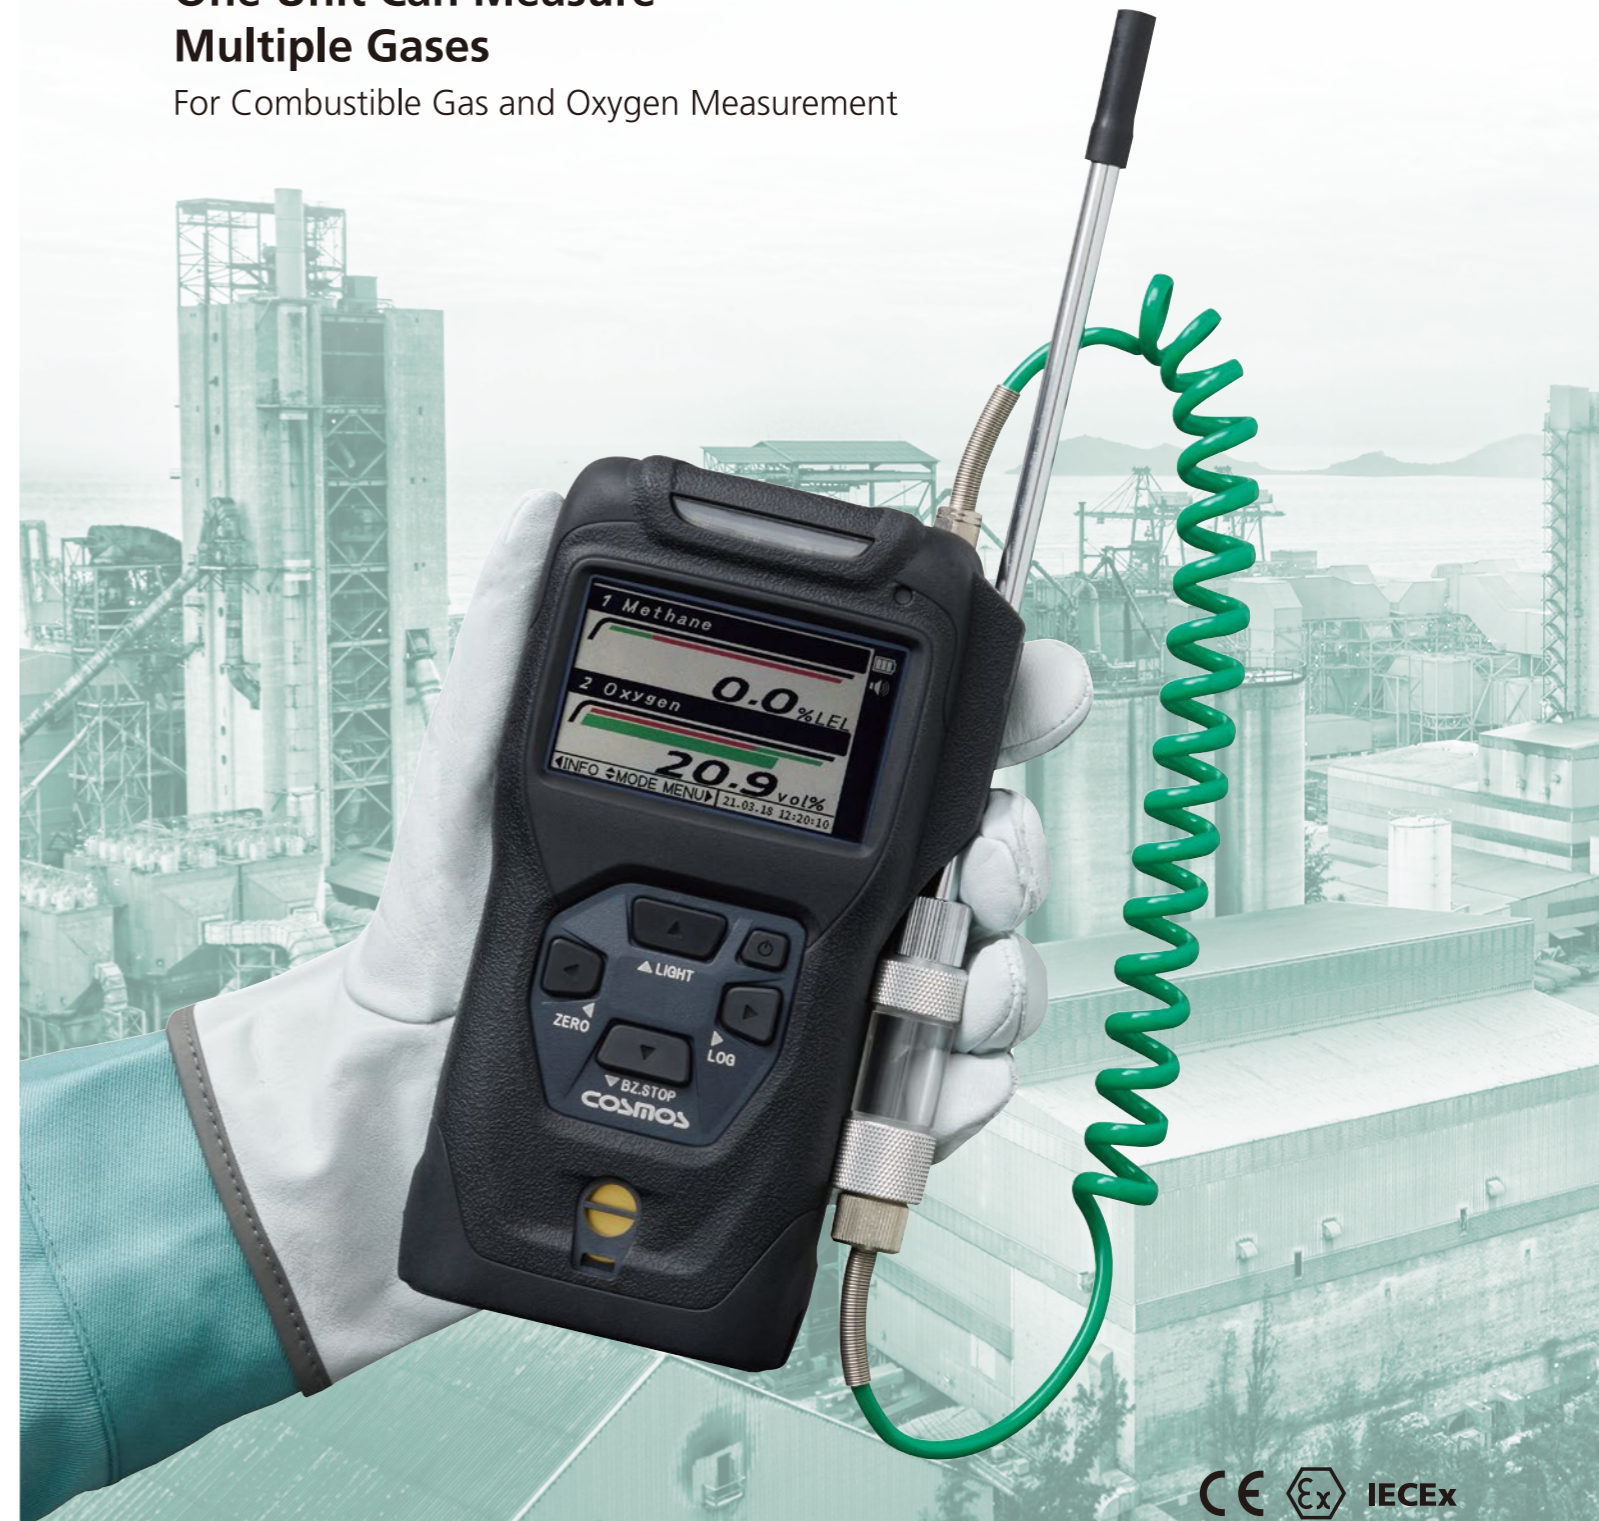

**SAFETY WARNING**

Carefully read the instruction manual prior to use.  
 Select and use the device designed to detect the required type of gas. Use of a wrong sensor type may cause an accident.



**Features**

**Convert to 32 types gas's concentration**

\*Only for XP-3310II, XP-3318II, XP-3360II-W and XP-3368II-W units, in which GAS1 (target gas) is set to methane, isobutane or propane.  
 \*Converted gas concentration is only an estimate and no guarantee is provided.

**Convertible Gas List**

Acetone	Cyclohexane	Ethyl acetate	n-Hexane	Methanol	Propane
Toluene	Acetylene	Cyclopentane	Ethylbenzene	Hydrogen	Methylcyclohexane
Propyl acetate	o-Xylene	Benzene	DME	Ethylene	IPA
MIBK	Propylene	m-Xylene	n-Butane	Ethane	Gasoline
MEK	n-Pentane	THF	p-Xylene	i-Butane	Ethanol
n-Heptane	Methane				

**Robust design**

- Passed 7m drop test
- Waterproof and dustproof, IP67 (Photo1)

**Wide range models**

Enable to measure in "%LEL" and "ppm"  
 \*Only for XP-3360II-W and XP-3368II-W



(Photo1)

**OTHER FEATURES**

- Up to five combustible gases can be set as target gas (optional)
- Selectable power supply: alkaline AA batteries / rechargeable nickel metal hydride AA batteries
- Timer and stopwatch function



**Appearance**



**Optional Accessories**



**Lineup**

Target Gas	Model	XP-3310II	XP-3360II	XP-3360II-W	XP-3318II	XP-3368II	XP-3368II-W	XP-3380II
Combustible Gas	%LEL	○		○	○		○	
	ppm		○	○		○	○	
Oxygen					○	○	○	○